

# MikroTik new 60 GHz implementation

Antons Beļajevs

MikroTik, Latvia

MUM Philippines

January 2018

# Wireless band comparison

2.4 GHz 802.11b/g/n	5 GHz 802.11a/n/ac	60 GHz 802.11ad
<p>Cons</p> <ul style="list-style-type: none"><li>• Crowded spectrum</li><li>• Low channel count</li></ul>	<p>Cons</p> <ul style="list-style-type: none"><li>• DFS and radar detection</li><li>• Rapidly increasing channel widths</li></ul>	<p>Cons</p> <ul style="list-style-type: none"><li>• Oxygen absorption</li><li>• Low distance</li></ul>
<p>Pros</p> <ul style="list-style-type: none"><li>• Higher distances</li><li>• Better penetration through objects</li></ul>	<p>Pros</p> <ul style="list-style-type: none"><li>• High throughput</li><li>• More available channels</li></ul>	<p>Pros</p> <ul style="list-style-type: none"><li>• The highest throughput</li><li>• Free spectrum</li></ul>

# Wireless modes

- Wireless modes for 60 GHz
  - “ap-bridge”
  - “bridge”
  - “station-bridge”
  - “sniff”
- Configuration under “/interface w60g” menu
  - SSID
  - Password
  - Mode

# Wireless Wire



# Wireless Wire

- Pre-configured 60 GHz radio link (Plug and Play)
- 4 core CPU running at 716 MHz, 256 MB of RAM
- Only 5 W of maximum power consumption.
- Range of 100 meters or more (1 Gbit full duplex speeds)
- Beamforming and PtMP support

# Wireless Wire

- Channel bandwidth 2.16 GHz
- Total EIRP under 40 dBm
- 32 antenna elements
- Sweeps between 64 antenna patterns
- Wireless coverage close to 180 degrees
- Price \$198


# Comparison with other MikroTik devices

- The highest wireless throughput compared to any MikroTik wireless device at the moment

Band	Max throughput			Tested device
	TX	RX	TX+RX	
2.4 GHz dual chain	256Mbps	255Mbps	252Mbps	r11e-2HPnD + RB800
5 GHz dual chain	560Mbps	561Mbps	570Mbps	r11e-5HPacD + RB800
60 GHz	1Gbps	1Gbps	2Gbps	Wireless Wire kit

- Price/performance sweet spot for short wireless links


# Performance in 100 meter link

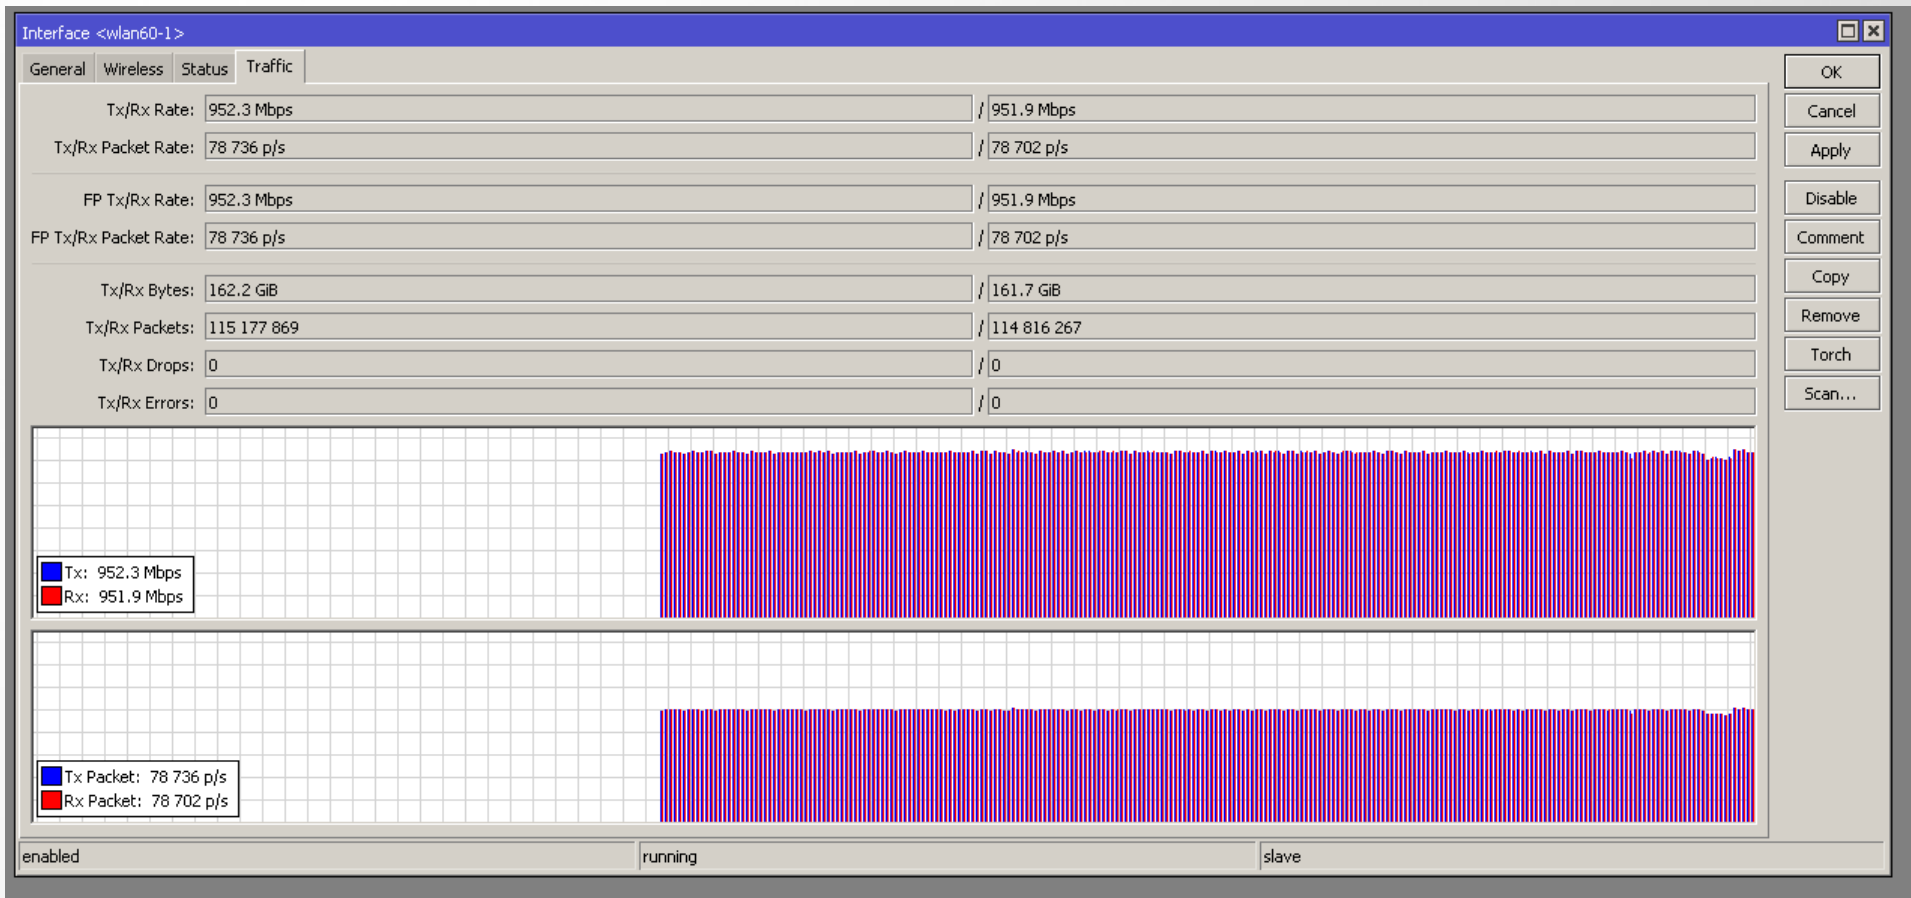

Winbox traffic graph showing “Wireless Wire” speed on 100 m link



# Performance comparison to wired network

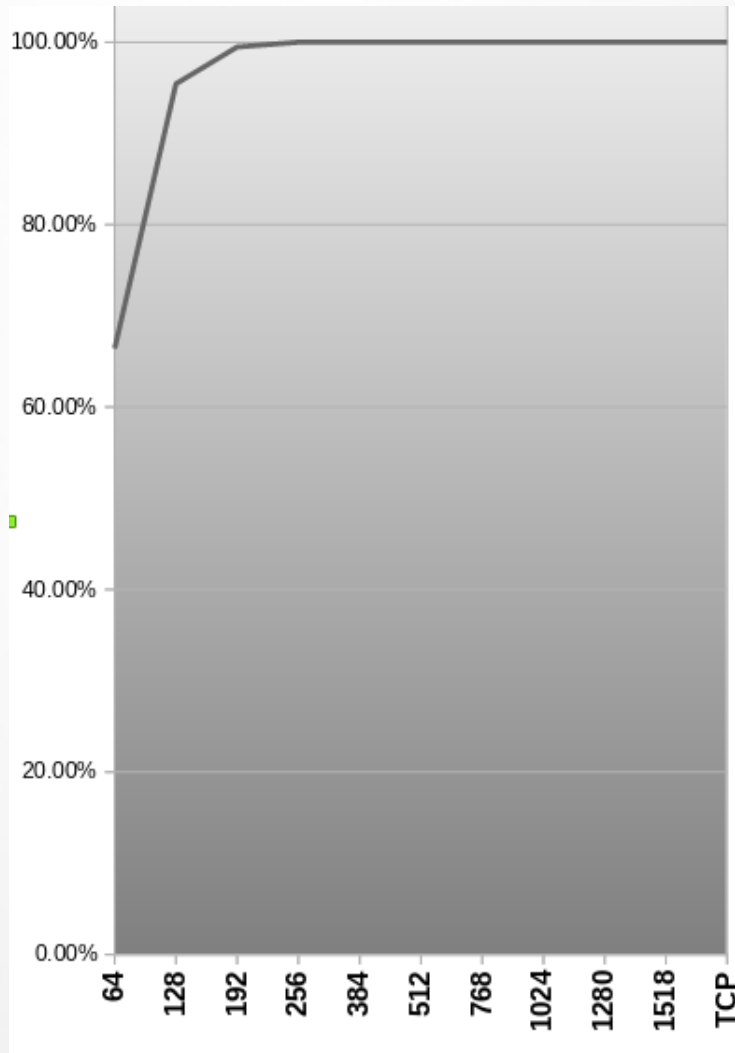

Throughput (<0,1% loss)	Theoretical max		4096 Streams both ways		
	kpps	Mbps	kpps	Mbps	%
64	2976.1	1,523.8	1977	1,012.2	<b>66.43</b>
128	1689.2	1,729.7	1612	1,650.7	<b>95.43</b>
192	1179.2	1,811.3	1173	1,801.7	<b>99.47</b>
256	905.8	1,855.1	905.8	1,855.1	<b>100.00</b>
384	618.8	1,901.0	618.8	1,901.0	<b>100.00</b>
512	469.9	1,924.7	469.9	1,924.7	<b>100.00</b>
768	317.2	1,948.9	317.2	1,948.9	<b>100.00</b>
1024	239.4	1,961.2	239.4	1,961.2	<b>100.00</b>
1280	192.3	1,969.2	192.3	1,969.2	<b>100.00</b>
1518	162.5	1,973.4	162.5	1,973.4	<b>100.00</b>
TCP connection	181.6	1,970.6	181.6	1,970.6	<b>100.00</b>

All UDP tests are done with Xena Networks specialized test equipment (XenaBay), and done according to RFC2544 (Xena2544) with 0,1% acceptable loss

TCP tests done by using iperf3:


<https://iperf.fr/>

# Point to Multi Point support

- Experimental support already available starting from 6.41
- Requires level 4 license for AP device
- Connected clients are treated as individual interfaces - easy to configure and manage
- Supports 8 simultaneously connected clients

# PtMP performance

- Beamforming capability provides larger coverage area

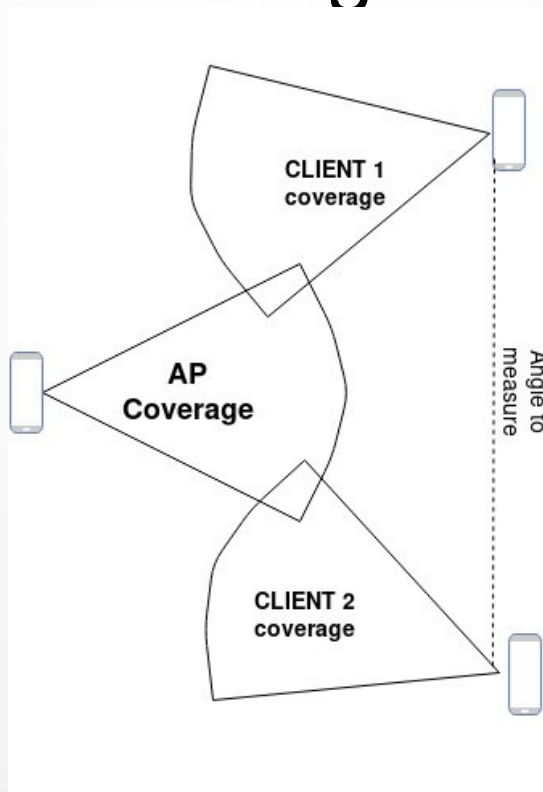

Distance in meters			Angle degrees
AP –CLIENT 1	AP –CLIENT 2	CLIENT 1 – CLIENT 2	
100	99	62	36.3
93	99	94	58.5
93	102	105	63.7
91.6	89	93	61.9
99	89	111.5	72.5
109	89	130	81.3
76	89	119	91.9
87.7	89	140	104.8
82.7	89	152	124.5

*Tests done with 200 Mbps full duplex traffic to each client device*

# PtMP performance

- Up to 400 Mbps simultaneously to each client in PtMP setup with 4 clients

```
[admin@60_AF] > interface monitor-traffic wlan60-slave-1,wlan60-slave-2,wlan60-slave-3,wlan60-slave-4
      name: wlan60-slave-1 wlan60-slave-2 wlan60-slave-3 wlan60-slave-4
rx-packets-per-second:      16 431      16 034      16 106      16 933
rx-bits-per-second:         198.7Mbps   193.9Mbps   194.8Mbps   204.8Mbps
fp-rx-packets-per-second:   16 431      16 034      16 106      16 933
fp-rx-bits-per-second:     198.7Mbps   193.9Mbps   194.8Mbps   204.8Mbps
rx-drops-per-second:        0          0          0          0
rx-errors-per-second:       0          0          0          0
tx-packets-per-second:      16 431      16 050      16 106      16 622
tx-bits-per-second:         198.7Mbps   194.1Mbps   194.8Mbps   201.0Mbps
fp-tx-packets-per-second:   16 431      16 050      16 106      16 622
fp-tx-bits-per-second:     198.7Mbps   194.1Mbps   194.8Mbps   201.0Mbps
tx-drops-per-second:        0          0          0          0
tx-queue-drops-per-second:  13         364        318        0
tx-errors-per-second:       0          0          0          0
-- [Q quit|D dump|C-z pause]
```

# W60G new features

- Revised "master" and "slave" interface modes to more familiar "bridge", "ap-bridge", "station-bridge"
- Added "put-stations-in-bridge" and "isolate-stations" options to manage connected clients
- MCS rates under MCS4 now are supported
- Range increased over 200 m+
- SNMP support starting from 6.42rc7

# Wireless device testing

## Few suggestions:


- It is preferred not to run testing tools on devices under test
- Check for bottlenecks
- Wireless devices can suffer from interference
- Test at power outputs that will be used on the device

# Testing software

- Bandwidth test
  - Works under RouterOS, PC (Windows, Mac, Linux)
- Traffic Generator
  - Works under RouterOS
- Iperf and iperf3
  - Works on PC (Windows, Mac, Linux)
- Speedtest.net
- Other tools

# Live demo

## Test setup:

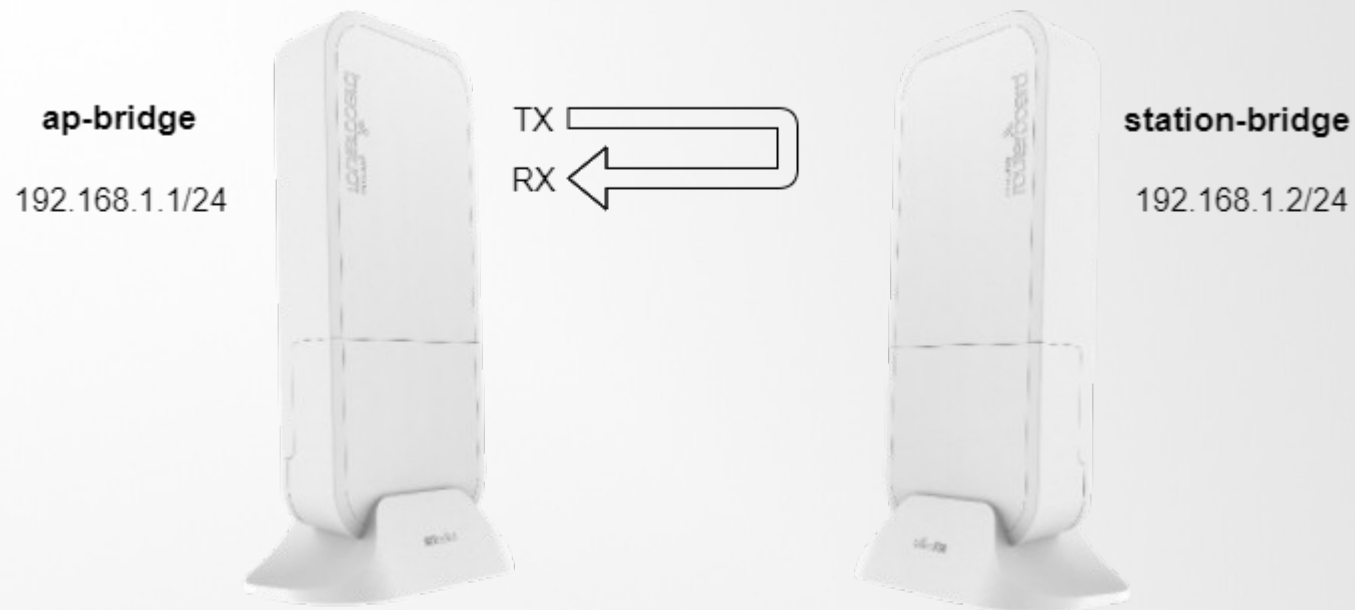

```
/tool traffic-generator packet-template  
add ip-dst=192.168.1.1 ip-gateway=192.168.1.2 ip-src=192.168.1.10 name=test1 udp-dst-port=100-300  
/tool traffic-generator stream  
add mbps=900 name=stream1 packet-size=1500 tx-template=test1
```



# Live demo

- To start Traffic Generator run:

*/tool traffic-generator start*


- To stop:

*/tool traffic-generator stop*

- To run temporary Traffic Generator with extra arguments:

*/tool traffic-generator quick mbps=300 packet-size=256 duration=100*

# Live demo

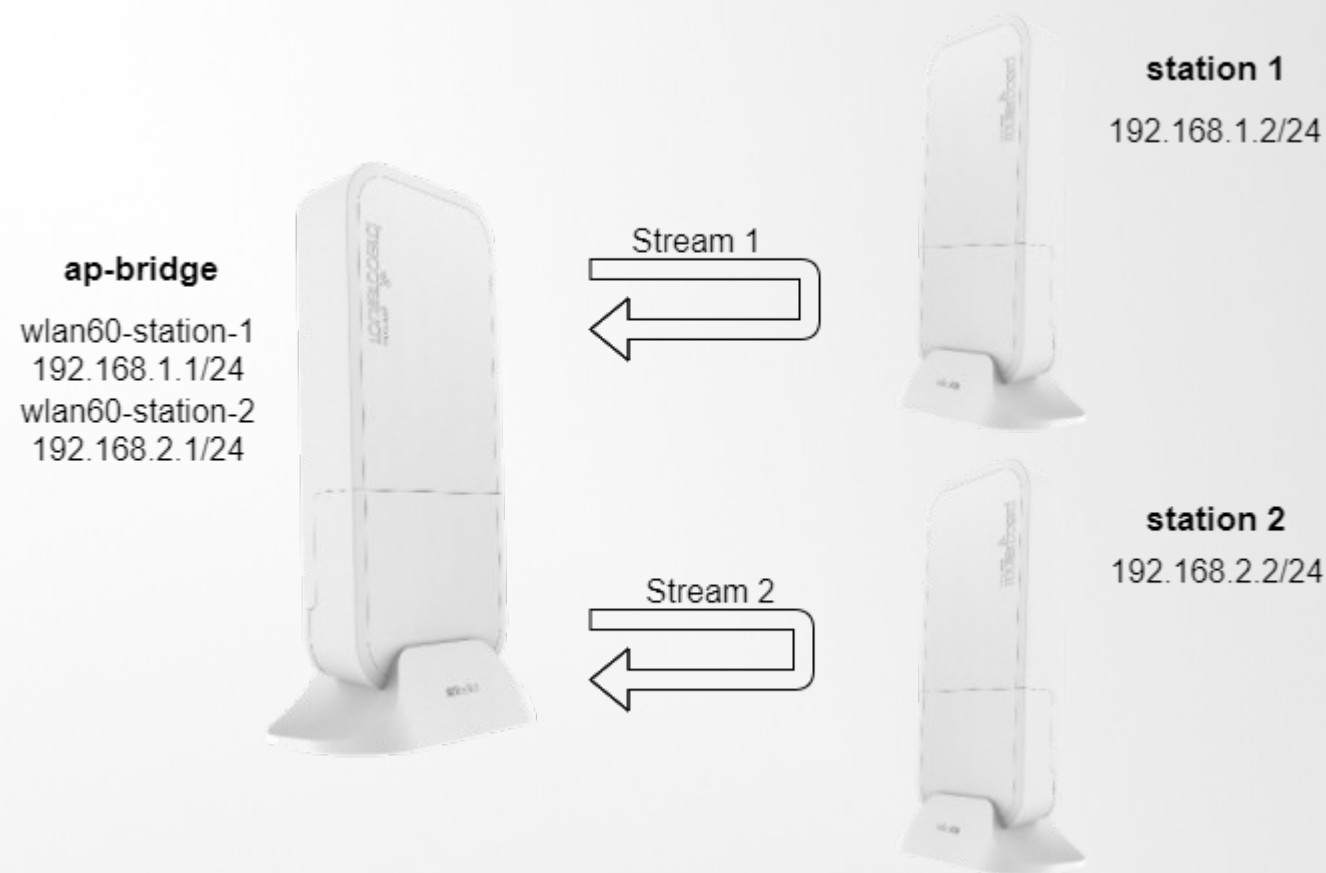

```
/tool traffic-generator packet-template  
add interface=wlan60-slave-1 ip-dst=192.168.1.1 ip-gateway=192.168.1.2 ip-src=192.168.1.10 name=pt0  
add interface=wlan60-slave-2 ip-dst=192.168.2.1 ip-gateway=192.168.2.2 ip-src=192.168.2.10 name=pt1  
/tool traffic-generator stream  
add mbps=400 name=str0 packet-size=1500 tx-template=pt0  
add id=1 mbps=400 name=str1 packet-size=1500 tx-template=pt1
```

**Thank you for your attention**