



WISP / Industrial/ Residential, Marinas Deployment, Using MikroTik CapsMan With Best Features

**By Shakeel Khan
Dreams Network & Technology Pvt (Ltd)
Pakistan**



About Me

- **Name:**

- **Shakeel Khan**

- **Education:**

Bachelors In Engineering

- **Position:**

- **Technical Product Manager**

- **Trainings:**

- ▶ Only Mikrotik Trainer & Consultant In Pakistan From **USA**
- ▶ MTCNA (MikroTik Certified Network Associate)
- ▶ MTCWE (MikroTik Certified Wireless Engineer)
- ▶ MTCTCE (MikroTik Certified Traffic Control Engineer)
- ▶ UBWS (Ubiquiti Broadband Wireless Specialist)
- ▶ UBWA V2 (Ubiquiti Broadband Wireless Admin)
- ▶ UBWE (Ubiquiti Enterprise Wireless Admin Ubiquiti Broadband Wireless Admin)
- ▶ VoIP YEASTAR

About Company

- ▶ Started in 2003
- ▶ Top Wireless/Security & Network Equipment Distributor in Pakistan.
- ▶ We are Master Distributor for:



We Deals in:

- ▶ IT Managed Services
- ▶ E & I Managed Services
- ▶ Training & Consultancy
- ▶ M2M Solutions
- ▶ Security Solutions
- ▶ Electrical & Instrumentation Solutions with SCADA

Presentation Objectives

- ▶ Best Possible Understanding Of Centralized Management System WIFI Hotspots
- ▶ Modes of Wireless Networks
- ▶ Applications of Wireless Networks
- ▶ Centralized Management
- ▶ Mikrotik's CAPsMAN & its Deployment
- ▶ Questions & Answers

Modes Of Wireless Networks

PTP (Point to Point):

- ▶ Required for long distance links
- ▶ High throughput (BACKHUAL PURPOSE)

PTMP (Point to Multi Point):

- ▶ Mostly in WISP's (One To Many)
- ▶ Shared link with multiple users
- ▶ Cheap compared to point to point

Centralized Managed Wireless Network (Enterprise Hotspots)

- ▶ To provide wireless coverage for the roaming/fixed stations
- ▶ Highly managed

Advantage & Disadvantage of Wireless Networks

Advantages:

- ▶ Required minimum time for installation
- ▶ Low cost
- ▶ High availability

Disadvantages / Limitations:

- ▶ Bandwidth limitations
- ▶ Regulatory limitations (Where Applicable)

Mostly Applications of Wireless Network

- ▶ Wireless ISPs
- ▶ Wireless CCTV
- ▶ Wireless VoIP
- ▶ Wireless Advertisements
- ▶ Wireless SCADA
- ▶ Wireless Data Networks

Why We Need Centralized Managed System ?


- ▶ For high availability of network
- ▶ One click management
- ▶ One windows statics of network

Applications:

- ▶ Hospitals
- ▶ Universities
- ▶ Industries
- ▶ Malls and cafe
- ▶ Homes / Apartments
- ▶ Ports and container terminals


Conventional problems

- ▶ Conventionally, administering Wireless Access Point is done Individually one by one.
- ▶ Administrator has to make sure That the configurations are the Same for all APs like SSID, Security, Access List, Policy, etc.
- ▶ That needs more time and Manpower if we need to changes something for the enterprise WLAN Setups i.e Apartment As Shown.

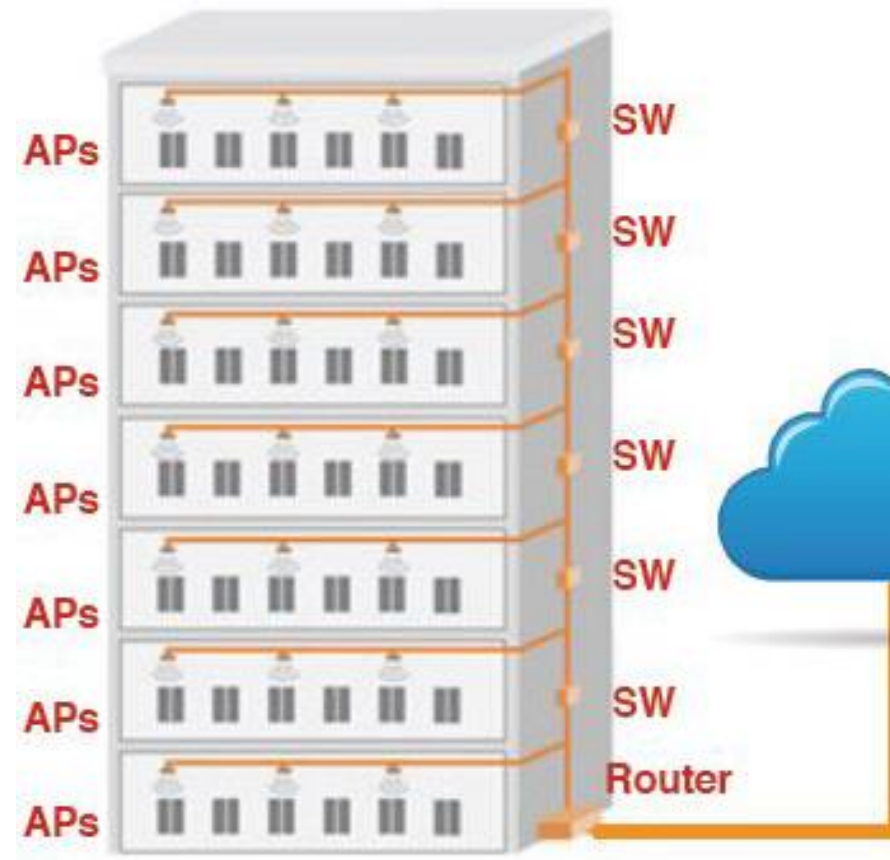

Solution

- Using Mikrotik Capsman
It Shall Fix All conventional Problems.

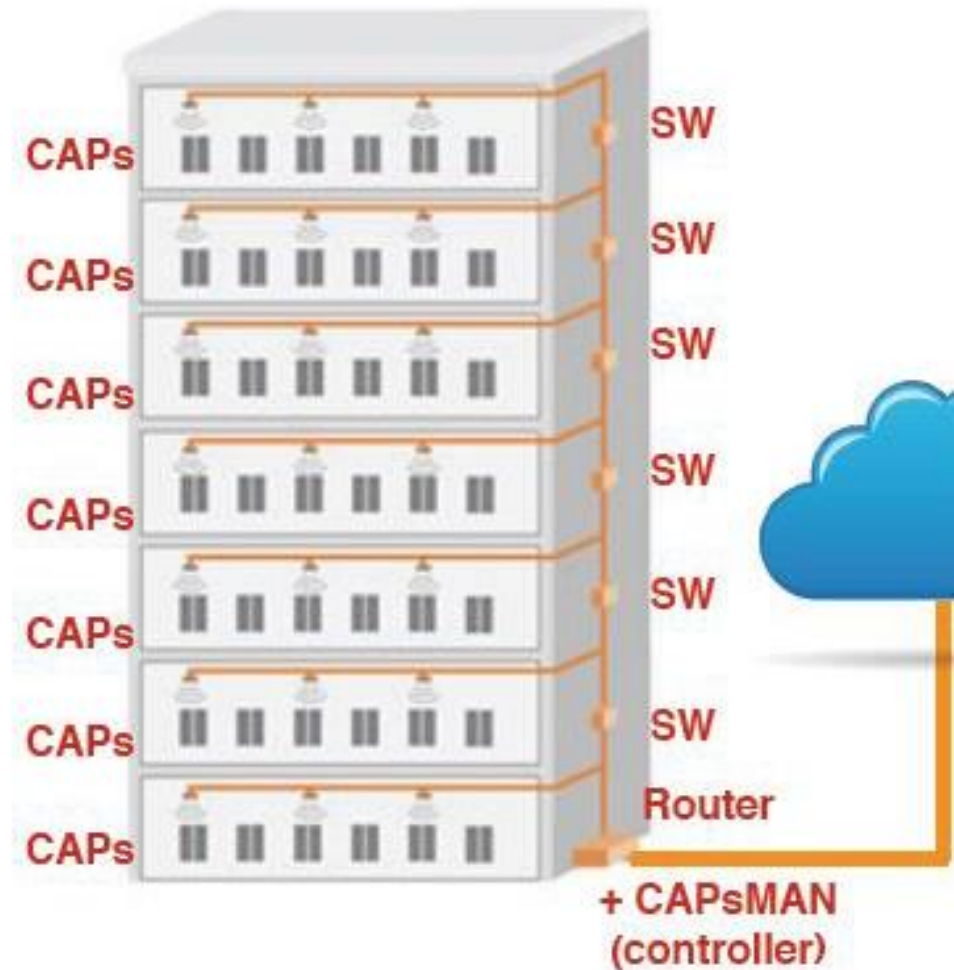

Solution with MIKROTIK CAPsMAN (Success Story)



Reason to use MIKROTIK CAPsMAN

- ▶ Highly flexible
- ▶ Reliable
- ▶ No additional license required (Comes Free With Routerboard Hardware)
- ▶ Highly scalable
- ▶ CAP can be any MIKROTIK hardware with at least one wireless interface
- ▶ Centralized management of RouterOS APs
- ▶ Dual Band AP support
- ▶ Provisioning of APs
- ▶ MAC and IP Layer communication with APs
- ▶ Certificate support for AP communication
- ▶ Full and Local data forwarding mode
- ▶ RADIUS MAC authentication
- ▶ Custom configuration support
- ▶ Easy availability
- ▶ Low cost

Component of CAPs Management System


► CAPsMAN

- x86 or RouterBOARD based device
- Newest RouterOS version
- Wireless-cm2 package installed and enabled

► CAP

- X86 or RouterBOARD based device
- Newest RouterOS v6 version
- Atheros chipset (a/b/g/n/ac) wireless card
- Wireless-cm2 package installed and enabled
- At least Level4 RouterOS license

CAPsMAN Simple Setup

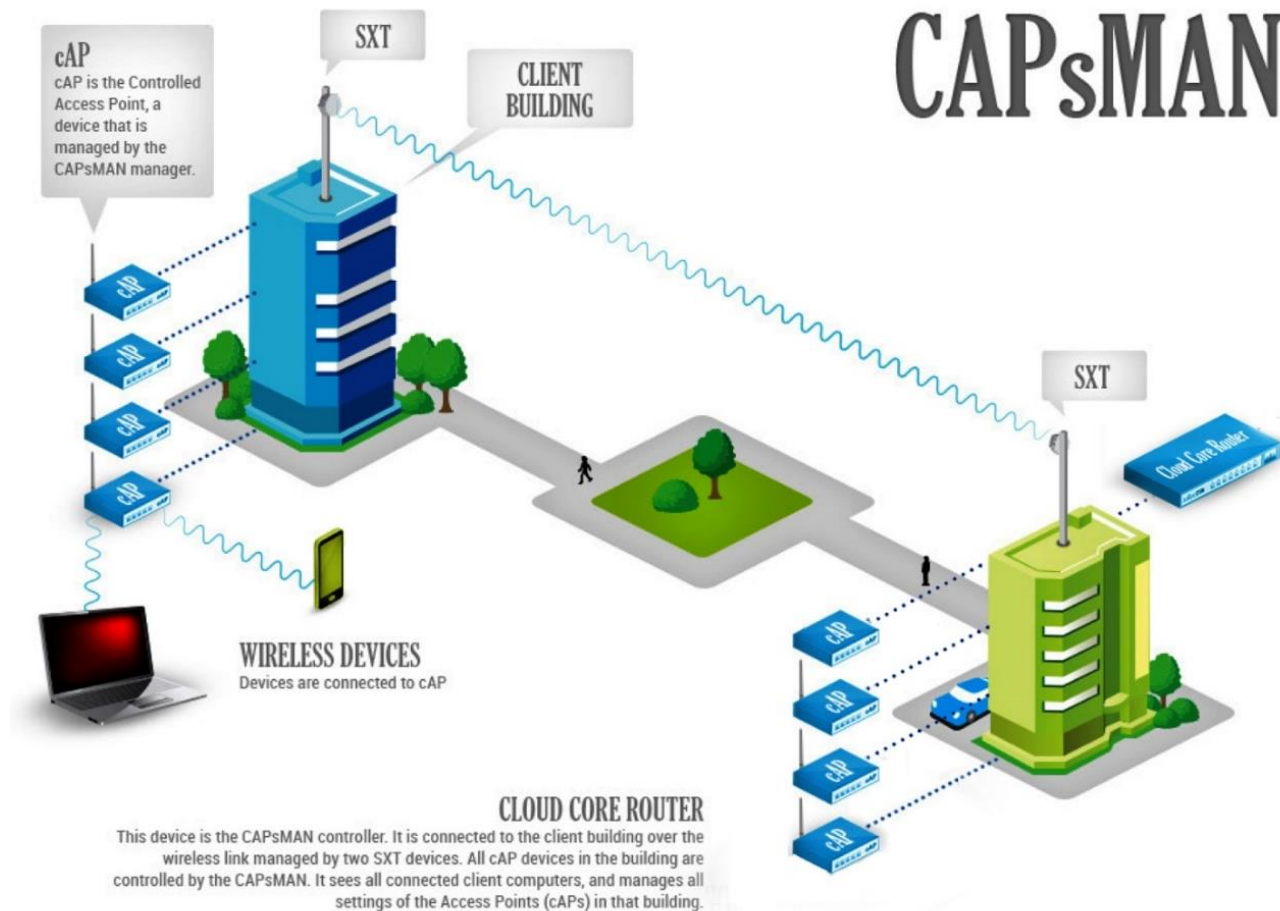

CAPsMAN v2 features

- ▶ CAPsMAN automatic upgrade of all CAP clients (configurable)
- ▶ Improved CAP<->CAPsMAN data connection protocol
- ▶ Added "Name Format" and "Name Prefix" setting for Provision rules
- ▶ Improved logging entries when client roams between the CAPs
- ▶ Added L2 Path MTU discovery

CAPsMAN v2 compatibility

- ▶ CAPsMAN v2 is NOT compatible with current CAPsMAN v1 (CAPsMAN v1 CAP devices will not be able to connect to CAPsMAN v2 and CAPsMAN v2 CAP devices will not be able to connect to CAPsMAN v1).
- ▶ Both CAPsMAN and CAP devices should have wireless-cm2 package installed in order to make CAPsMAN v2 system to work.

CAPsMAN/Cap Setup Step By Step

- ▶ **Enable CAPsMAN service**
- ▶ **Create Bridge interface**
- ▶ **Add IP configuration to Bridge interface**
- ▶ **Run DHCP Server with NAT**
- ▶ **Create CAPsMAN Configuration**
- ▶ **Create Provisioning rule**
- ▶ **Enable CAP mode on the Aps**
- ▶ **Efficient Roaming Configuration TIP**
- ▶ **Specific Brand Allow Only Without Authentication**

CAPsMAN Setup LAB

admin@192.168.1.1 (CAPsMAN CONTROLLER) - WinBox v6.30.4 on RB2011UiAS (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 192.168.1.1

Quick Set CAPsMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log Radius Tools New Terminal LCD MetaROUTER Partition Make Supout.tif

Package List

Name	Version	Build Time	Scheduled
routing	6.30.4	Aug/25/2015 12:59:46	
security	6.30.4	Aug/25/2015 12:59:46	
system	6.30.4	Aug/25/2015 12:59:46	
wireless-cm2	6.30.4	Aug/25/2015 12:59:46	
wireless-fp	6.30.4	Aug/25/2015 12:59:46	

12 items (1 selected)

CAPsMAN

Interfaces Provisioning Configurations Channels Datapaths Security Cfg. Access List Remote CAP Radio Registration Table

Manager

Name	Type	MTU	L2 MTU	Tx	Rx	Tx Packet (p/s)	Rx Packet (p/s)	SSID
------	------	-----	--------	----	----	-----------------	-----------------	------

CAPs Manager

☒ Enabled

Certificate: auto

CA Certificate: auto

☐ Require Peer Certificate

Generated Certificate: CAPsMAN-E48D8C0D8C06

Generated CA Certificate: CAPsMAN-CA-E48D8C0D8C06

Package Path:

Upgrade Policy: none

OK Cancel Apply

CAPsMAN Setup LAB

The screenshot displays the MikroTik WinBox interface with the following configurations:

- Bridge Configuration (1):** The 'Bridge' tab is selected. A bridge named 'bridge1' is listed with type 'Bridge' and L2 MTU of 1598.
- Address List Configuration (2):** The 'Address List' tab is selected. A new address list is created with address '192.168.1.1/24', network '192.168.1.0', and interface 'bridge1'.
- DHCP Server Configuration (3):** The 'DHCP' tab is selected. A DHCP server named 'dhcp1' is configured with interface 'bridge1'.
- Firewall NAT Configuration (4):** The 'NAT' tab is selected. A new NAT rule is created with action 'mas...' (masquerade) and chain 'srcnat'.

CAPsMAN Setup LAB

admin@192.168.1.1 (CAPsMAN CONTROLLER) - WinBox v6.30.4 on RB2011UiAS (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 192.168.1.1

Quick Set CAPsMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System Queues Files Log Radius

CAPsMAN

Interfaces Provisioning Configurations Channels Datapaths Security Cfg Access List Remote CAP Radio Registration Table

Find

Name	Frequency	Width	Band	Extension Channel	Tx. Power
CAPs.Channel <channel1>					
Name: channel1	Frequency: 2412 MHz	Width: 20 MHz	Band: 2ghz-b/g/n	Extension Channel: disabled	Tx. Power:
					OK Cancel Apply Comment Copy Remove

CAPs Datapath Configuration <datapath1>

Name: datapath1 Bridge: bridge 1 Bridge Cost: Bridge Horizon: Local Forwarding: Client To Client Forwarding: VLAN Mode: VLAN ID:

OK Cancel Apply Comment Copy Remove

CAPs Security Configuration <LAB SECURITY>

Name: LAB SECURITY Authentication Type: WPA PSK WPA2 P Encryption: aes ccm tkip Group Encryption: aes ccm Passphrase: 987654321 EAP Methods: TLS Mode: TLS Certificate:

CAPsMAN Setup LAB

admin@192.168.1.1 (CAPsMAN CONTROLLER) - WinBox v6.30.4 on RB2011UiAS (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 192.168.1.1

CAPsMAN

Interfaces Provisioning **Configurations** Channels Datapaths Security Cfg. Access List Remote CAP Radio Registration Table

New CAPs Configuration

Wireless Channel Datapath Security

Name: MUM-CONFIGURATION
Mode: ap
SSID: MUM-USA-2016
Hide SSID:
Load Balancing Group:
Country: pakistan
Max Station Count:
Multicast Helper:
HT Tx Chains:
HT Rx Chains:
HT Guard Interval:

OK Cancel Apply Comment Copy Remove

New CAPs Configuration

Wireless **Channel** Datapath Security

Channel: channel1
Frequency:
Width:
Band:
Extension Channel:
Tx. Power:

OK Cancel Apply Comment Copy Remove

CAPs Configuration: <cfg1>

Datapath Security

Datapath: datapath1
Bridge: bridge1
Bridge Cost:
Bridge Horizon:
Local Forwarding:
Client Forwarding:
VLAN Mode:
VLAN ID:

New CAPs Configuration


Wireless Channel Datapath **Security**

Security: LAB SECURITY
Authentication Type:
Encryption:

OK Cancel Apply Comment

OS WinBox

CAPsMAN Setup LAB Complete

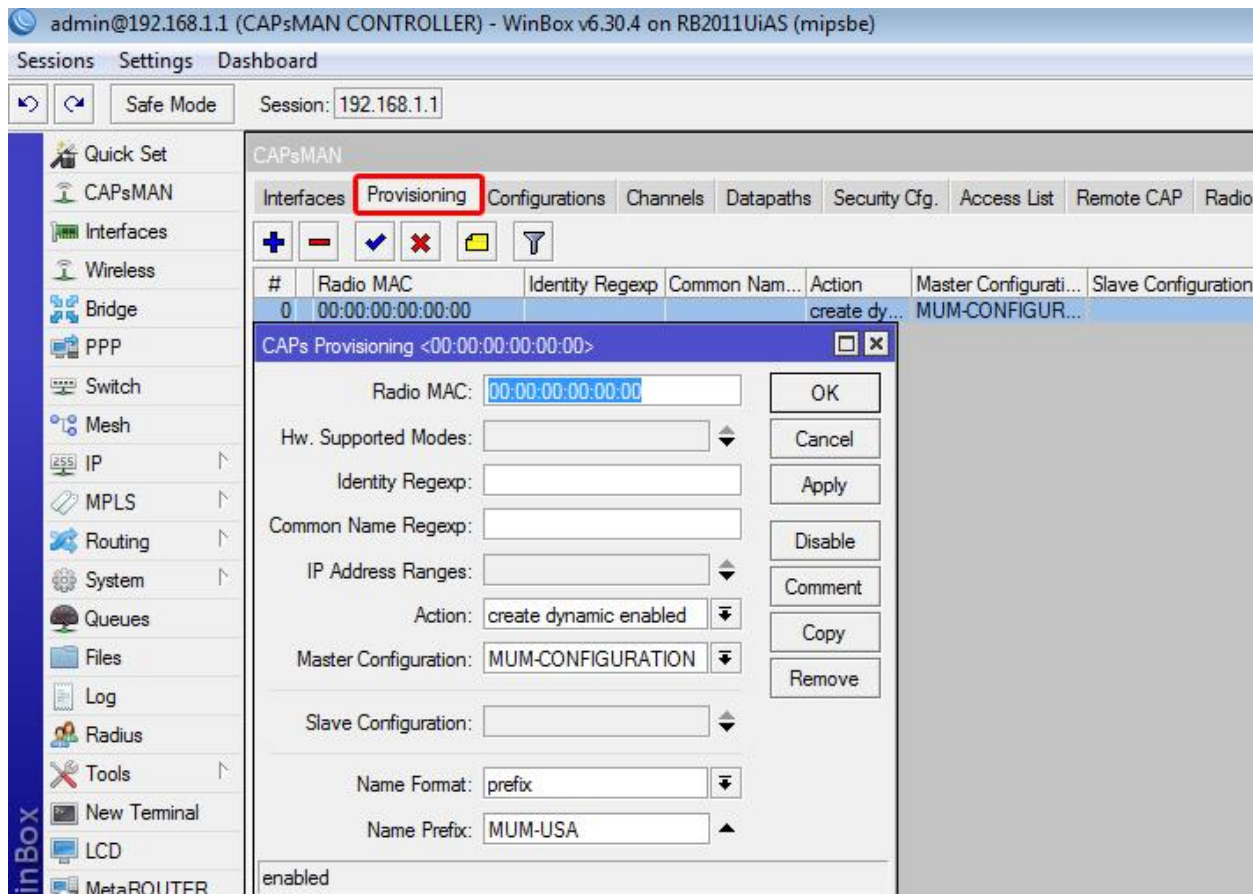

CAP to CAPsMAN Connection

▶ MAC Layer2:

- No IP configuration required
- CAP and CAPsMAN must be in the same Layer 2 network

▶ IP (UDP) Layer3:

- CAP must reach the CAPsMAN using IP protocol
- Can traverse NAT if necessary

- **Management connection between CAP and CAPsMAN is secured using DTLS.**
- **CAP client data traffic is not secured – if necessary additional encryption by using IPSec or encrypted tunnels is needed**

How Cap Selects CAPSMAN

- ▶ **CAP attempts to contact CAPsMAN and build available CAPsMAN list:**
 - List of CAPsMAN IPs,.
 - List of CAPsMAN IPs obtained from DHCP.
 - Broadcasting on configured interfaces using IP and MAC Layer.
- ▶ **CAP selects the CAPsMAN based on such rules:**
 - If CAPsMAN names setting is matched it will prefer that CAPsMAN earlier in the list
 - MAC layer connectivity to CAPsMAN is preferred over IP connectivity
 - If list is empty it will connect to any available CAPsMAN

CAP Configuration on AP LAB

admin@00:0C:42:8D:08:3E (WAP CAP 1) - WinBox v6.33.3 on wAP (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 00:0C:42:8D:08:3E

Bridge Ports Filters NAT Hosts

Name	Type	L2 MTU	Tx	Rx
R bridge1	Bridge	1598	51.9 kbps	

1

DHCP Client DHCP Client Options

Interface	Use P...	Add D...	IP Address	Expires After	Status
ether1	yes	yes	192.168.1.24...	00:08:56	bound

2

CAP

☒ Enabled

Interfaces: wlan1

Certificate: none

Discovery Interfaces: bridge1

☐ Lock To CAPsMAN

CAPsMAN Addresses: 192.168.1.1

CAPsMAN Names:

CAPsMAN Certificate Common Names:

OK Cancel Apply

Wireless Tables

Interfaces Nstreme Dual Access List Registration Connect List Security

CAP Scanner Freq. Usage

Name	Type	Tx
--- managed by CAPsMAN		
--- channel: 2412/20/gn(20dBm), SSID: MUM-USA-2016, local forwarding		
RS wlan1	Wireless (Atheros AR9...	4.0 kbps

3

4

1 item out of 3

CAPConfiguration on AP LAB

- ▶ Make sure that the latest package of firmware should be updated

The screenshot displays the WinBox v6.33.3 interface for a MikroTik WinBox user. The main window shows the 'Package List' tab, which contains a table of installed and available packages. The 'wireless-cm2' package is highlighted with a red box. A 'CAP' configuration dialog is open, showing various settings for the CAPsMAN interface.

Package List Table:

Name	Version	Build Time	Scheduled
advanced-t...	6.33.3	Dec/03/2015 16:08:10	
dhcp	6.33.3	Dec/03/2015 16:08:10	
hotspot	6.33.3	Dec/03/2015 16:08:10	
ipv6	6.33.3	Dec/03/2015 16:08:10	
mpls	6.33.3	Dec/03/2015 16:08:10	
ppp	6.33.3	Dec/03/2015 16:08:10	
routing	6.33.3	Dec/03/2015 16:08:10	
security	6.33.3	Dec/03/2015 16:08:10	
system	6.33.3	Dec/03/2015 16:08:10	
wireless-cm2	6.33.3	Dec/03/2015 16:08:10	
wireless-fp	6.33.3	Dec/03/2015 16:08:10	

CAP Configuration Dialog:

- ☒ Enabled
- Interfaces: wlan1
- Certificate: none
- Discovery Interfaces: bridge1
- ☐ Lock To CAPsMAN
- CAPsMAN Addresses: 192.168.1.1
- CAPsMAN Names:
- CAPsMAN Certificate Common Names:
- Bridge: bridge1
- Requested Certificate:
- Locked CAPsMAN Common Name:

CAP Connected with CAPsMAN LAB

The image displays three screenshots of the MikroTik WinBox interface, illustrating the configuration of a CAP (Client Access Point) connected to a CAPsMAN (Centralized Authentication and Policy Management) server.

Top Left Screenshot: WinBox v6.33.3 on WAP (mipsbe). The session is for user 'admin' with MAC address '00:0C:42:8D:08:3E'. The 'Wireless Tables' tab is active, showing a table with columns: Name, Type, Tx, and Rx. The table contains one entry: 'wlan1' (Wireless (Atheros AR9...)) with a Tx rate of 5.2 kbps. The status bar indicates '1 item out of 3'.

Top Right Screenshot: WinBox v6.32.4 on cAP (mi...). The session is for user 'admin' with MAC address 'E4:8D:8C:F4:7B:92'. The 'Wireless Tables' tab is active, showing a table with columns: Name, Type, Tx, and Rx. The table contains one entry: 'wlan1' (Wireless (Atheros AR9...)) with a Tx rate of 4 kbps.

Bottom Screenshot: WinBox v6.34.2 on RB Groove A-52HPn (mipsbe). The session is for user 'admin' with MAC address 'D4:CA:6D:BF:6E:80'. The 'Wireless Tables' tab is active, showing a table with columns: Name, Type, Tx, Rx, and Tx Pa. The table contains one entry: 'wlan1' (Wireless (Atheros AR9...)) with a Tx rate of 5.2 kbps and an Rx rate of 0 bps.

CAP Radio Table on CAPsMAN

admin@192.168.1.1 (CAPsMAN CONTROLLER) - WinBox v6.30.4 on RB2011UiAS (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 192.168.1.1

Quick Set
CAPsMAN
Interfaces
Wireless
Bridge
PPP
Switch
Mesh
IP
MPLS
Routing
System
Queues

CAPsMAN

Interfaces Provisioning Configurations Channels Datapaths Security Cfg. Access List Remote CAP **Radio** Registration Table

Provision Find

	Radio MAC	Remote CAP Name	Remote CAP Iden...	Interface
P	00:0C:42:8D:08:3E	[00:0C:42:8D:08:...	WAP CAP 1	MUM-USA1
P	D4:CA:6D:BF:6E:81	[D4:CA:6D:BF:6E:...	MikroTik	MUM-USA2
P	E4:8D:8C:F4:7B:93	[E4:8D:8C:F4:7B:...	MikroTik	MUM-USA3

3 items (3 selected)

CAP Identification On Capsman

- ▶ MAC / IP Address
- ▶ RouterBoard model
- ▶ Serial Number of the Board
- ▶ RouterOS version
- ▶ System Identity
- ▶ Main wireless MAC
- ▶ State of the CAP
- ▶ Provided radio count

CAPsMAN									
Interfaces Provisioning Configurations Channels Datapaths Security Cfg. Access List Remote CAP Radio Registration Table									
Provision Upgrade Set Identity									
Address	/	Name	Board	Serial	Version	Identity	Base MAC	State	Radios
00:0C:42:8D:08:3E		[00:0C:42:8D:...	RBwAP2nD	5D470150508A	6.33.3	MikroTik	00:0C:42:8D:08:3D	Run	1
D4:CA:6D:BF:6E:80		[D4:CA:6D:B...	RB Groove A...	448C0290B31C	6.34.2	MikroTik	D4:CA:6D:BF:6E:80	Run	1
E4:8D:8C:F4:7B:92		[E4:8D:8C:F4...	RBcAP2n	654705BD7E...	6.32.4	MikroTik	E4:8D:8C:F4:7B:92	Run	1

Station Registered on CAPsMAN

admin@192.168.1.1 (CAPsMAN CONTROLLER) - WinBox v6.30.4 on RB2011UiAS (mipsbe)

Sessions Settings Dashboard

Safe Mode Session: 192.168.1.1

Quick Set CAPsMAN Interfaces Wireless Bridge PPP Switch Mesh IP MPLS Routing System

CAPsMAN

Interfaces Provisioning Configurations Channels Datapaths Security Cfg. Access List Remote CAP Radio **Registration Table**

Find

Interface	SSID	MAC Address	Tx Rate	Rx Rate	Tx Signal	Rx Signal	Uptime	Tx/F
MUM-USA1	MUM-USA-2016	2C:33:7A:50:F2:33	52Mbps...	65Mbps...	0	-65	00:40:01...	27 051/
MUM-USA1	MUM-USA-2016	00:73:8D:8B:ED:CC	65Mbps...	65Mbps...	0	-43	00:38:58...	9 760/7
MUM-USA3	MUM-USA-2016	90:8D:6C:AF:9E:11	65Mbps...	65Mbps...	0	-60	00:14:54...	27 930/

3 items (1 selected)

CAPsMAN Access List Features

- ▶ MAC Authentication
- ▶ Radius Query support
- ▶ MAC Mask support
- ▶ Signal Range
- ▶ Time
- ▶ Private Passphrase
- ▶ VLAN ID assignment

Efficient Roaming Configuration TIP



Efficient Roaming Configuration TIP

admin@E4:8D:8C:ED:CB:37 (CAPSMAN) - WinBox v6.35 on RB951Ui-2HnD (mipsbe)

Session Settings Dashboard

Safe Mode Session: E4:8D:8C:ED:CB:37

CAPsMAN

Interfaces Provisioning Configurations Channels Datapaths Security Cfg. Access List Rates Remote CAP Radio Registration Table

#	MAC Address	MAC Mask	Interface	Signal Ra...	Action	Client To Clie...	VLAN Mo...	VLAN ID
0			all	-60..120	accept	yes		
1			all	-120..-61	reject	yes		

2 items (1 selected)

CAPs Access Rule <>

MAC Address: OK

MAC Mask: Cancel

Interface: Apply

SSID Regexp: Disable

Signal Range: Comment

Time

Action: Copy

Remove

AP Tx Limit:

Client Tx Limit:

Private Passphrase:

Client To Client Forwarding: ☒

RADIUS Accounting:

VLAN Mode:

VLAN ID:

enabled

CAPs Access Rule <>

MAC Address: OK

MAC Mask: Cancel

Interface: Apply

SSID Regexp: Disable

Signal Range: Comment

Time

Action: Copy

Remove

AP Tx Limit:

Client Tx Limit:

Private Passphrase:

Client To Client Forwarding: ☒

RADIUS Accounting:

VLAN Mode:

VLAN ID:

enabled

MAC Authentication

- By using this rule you can reject the undesired stations only

The screenshot displays the RouterOS WinBox interface. The top status bar shows the user 'admin@E4:8D:8C:ED:CB:37 (CAPSMAN)' and the version 'winBox v6.35 on RB951UI-2HnD (mipsbe)'. The left sidebar contains a menu with options like Quick Set, CAPsMAN, Interfaces, Wireless, Bridge, PPP, Switch, Mesh, IP, MPLS, Routing, System, Queues, Files, Log, Radius, Tools, New Terminal, MetaROUTER, Partition, Make Supout.nif, Manual, New WinBox, and Exit.

The main window is titled 'CAPsMAN' and shows a table of configurations. The 'Access List' tab is active, displaying a table with columns: #, MAC Address, MAC Mask, Interface, Signal Range, Action, Client To Client Forwarding, VLAN Mode, and VLAN ID. The table contains three rows:

#	MAC Address	MAC Mask	Interface	Signal Range	Action	Client To Client Forwarding	VLAN Mode	VLAN ID
0	90:8D:6C:AF:9E:11				reject			
1			all	-60..120	accept	yes		
2			all	-120..61	reject	yes		

A dialog box titled 'CAPs Access Rule <90:8D:6C:AF:9E:11>' is open, showing configuration fields for the selected rule. The fields are: MAC Address (90:8D:6C:AF:9E:11), MAC Mask, Interface, SSID Regexp, Signal Range, Action (reject), AP Tx Limit, Client Tx Limit, Private Passphrase, Client To Client Forwarding, RADIUS Accounting, VLAN Mode, and VLAN ID. The 'Action' field is set to 'reject'. The dialog also includes buttons for OK, Cancel, Apply, Disable, Comment, Copy, and Remove. At the bottom of the dialog, it says 'enabled'.

At the bottom of the WinBox window, it says '3 items (1 selected)'.

Brand Based Authentication

- By using this rule you can allow selected Brands Via Mac Orders

The screenshot displays the RouterOS WinBox interface, specifically the CAPsMAN configuration page. The left sidebar shows the navigation menu with options like Quick Set, CAPsMAN, Interfaces, Wireless, Bridge, PPP, Switch, Mesh, IP, MPLS, Routing, System, Queues, Files, Log, Radius, Tools, New Terminal, MetaROUTER, Partition, Make Supout.rif, Manual, New WinBox, and Exit.

The main configuration area is titled "CAPsMAN" and includes tabs for Interfaces, Provisioning, Configurations, Channels, Datapaths, Security Cfg., Access List, Rates, Remote CAP, Radio, and Registration Table. The "Access List" tab is currently selected, showing a table of access rules.

#	MAC Address	MAC Mask	Interface	Signal Ra...	Action	Client To Clie...	VLAN Mo...	VLAN ID	Comment
3	90:8D:6C:00:00:00	FF:FF:FF:00:00:00			accept				Brand Allow
4					reject				Deny All

Below the table, it indicates "5 items (1 selected)". The selected rule is "CAPs Access Rule <90:8D:6C:00:00:00>". The configuration details for this rule are shown in the main area:

- MAC Address: 90:8D:6C:00:00:00
- MAC Mask: FF:FF:FF:00:00:00
- Interface: (empty)
- SSID Regexp: (empty)
- Signal Range: (empty)
- Time: 00:00:00 - 1d 00:00:00
- Days: ☒ sun ☒ mon ☒ tue ☒ wed ☒ thu ☒ fri ☒ sat
- Action: accept
- AP Tx Limit: (empty)
- Client Tx Limit: (empty)
- Private Passphrase: (empty)
- Client To Client Forwarding: (empty)
- RADIUS Accounting: (empty)
- VLAN Mode: (empty)
- VLAN ID: (empty)

The rule is currently "enabled".

Our Contact details

- ▶ **Official Address: C-89 2nd Floor Gulshan-e-Hadeed Phase-I,
Karachi, Pakistan-75010**
 - ▶ **Lahore**
- ▶ **Official Phone: 021-34710763 Ext : 301**
 - ▶ **Private Cell: +923018212944**
- ▶ **Official Website: www.dreamsnw.com**
 - ▶ **Official E-mail: info@dreamnw.com**
 - ▶ **<http://www.mikrotiktrainings.com/>**
- ▶ **Facebook :**
<https://www.facebook.com/DreamsNetworkTechnology>

Questions & Answers

<http://wiki.mikrotik.com/wiki/Manual:CAPsMAN>

Gift For First Two Questioners

<http://www.mikrotiktrainings.com/>

